



Lenses for high resolution line scan

- **Designed for high resolution line scan applications up to 12k**
- **Large image circle up to 90 mm for long linear array sizes**
- **High optical resolution for small pixel sizes down to 5 μm**
- **Low distortion for excellent imaging accuracy**
- **Optimized for magnification ratios from 0.5X to 2.0X**

Lenses for line scan applications




The line scan image capture method is useful and efficient for many web and other surface inspection applications. When choosing an appropriate camera, correct lens selection is critical to achieving the desired system performance. The size of the linear array sensor in the camera determines the minimum required image circle of the lens and the size of the sensor's pixels determines a particular optical imaging resolution. The desired object resolution defines the necessary magnification ratio for the optical system. These application specific parameters lets you choose the most suitable lens to meet all requirements with respect to image size and quality.

Today's high performance lenses must follow the technology trend toward smaller pixel sizes and increased sensor resolution. This typically results in larger array sizes and more stringent requirements concerning MTF (Modulation Transfer Function).


Makro-Symmar lenses are designed for industrial machine vision applications and satisfy even the most stringent requirements of next generation 12k line scan applications. Three different versions cover a magnification ratio range from 0.5X to 2.0X by using the lens either in standard or retro position. An extension tube together with a special helical mount is used to adjust the focus precisely. Focus as well as iris adjustment are lockable to ensure system stability even in presence of vibration. A tilt alignment tool can be used to adjust the sensor's orientation with respect to the optical axis of the lens. The V-mount interface allows alignment of the lens for the best average azimuth position with respect to the linear array.

Distortion

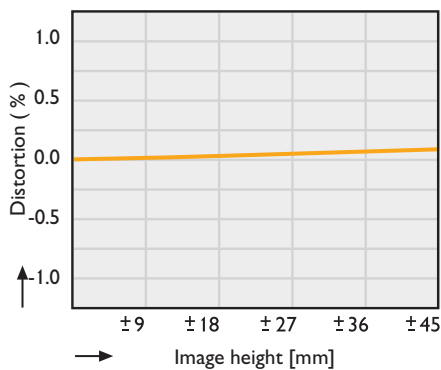


Distortion measured over the image height.

Modulation Transfer Function

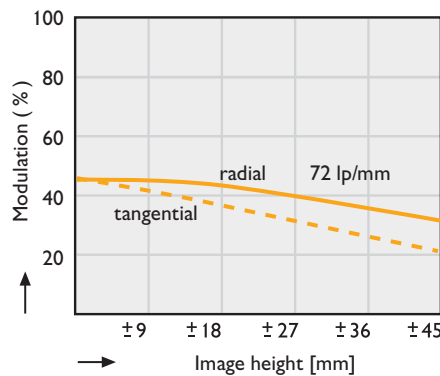


The MTF shows the contrast over the image height for a test pattern with 72 lp/mm.

Modulation Transfer Function

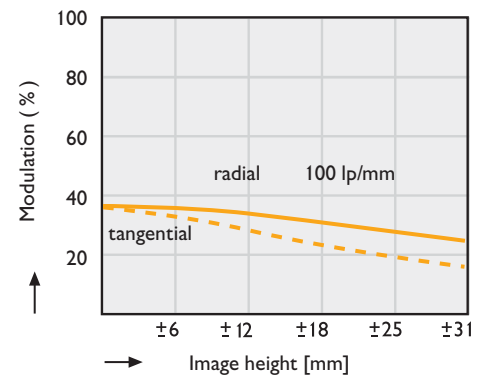

The MTF shows the contrast over the image height for a test pattern with 100 lp/mm.

Lens data


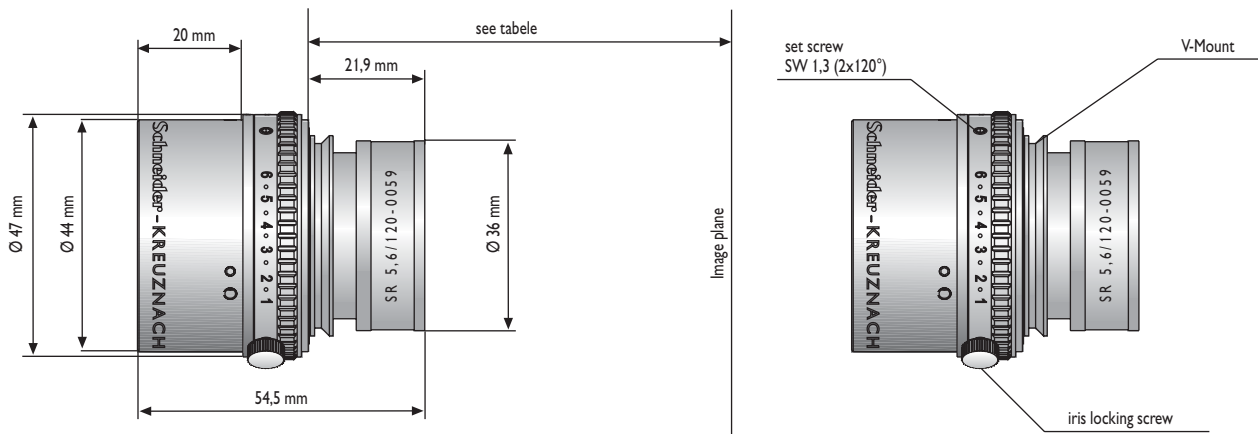


Lens data

Lens	Focal length	Max aperture	Sensor pixel size nominal	Image Circle	Nominal magnification	Magnification range	Distortion typical	Code No.
SR 5,6/120-0058	120 mm	F 5,9	7 µm	90 mm	1 X	0,88 X - 1.13 X	0.1 %	1002647
SR 5,6/120-0059	120 mm	F 5,9	7 µm	90 mm	0,75 X	0,63 X - 0.88 X	0.1 %	1002648
SR 5,6/120-0060	120 mm	F 5,9	7 µm	90 mm	0,5 X	0,38 X - 0.63 X	0.1 %	1002650

Lens	Mount type	Working distance (at nom. mag.)	Object to image distance	Flange-to-image distance	Filter thread	Weight
SR 5,6/120-0058	V-mount	229 mm	481 mm	219 mm	M 40,5 x 0,5	170 g
SR 5,6/120-0059	V-mount	253 mm	490 mm	204 mm	M 40,5 x 0,5	170 g
SR 5,6/120-0060	V-mount	332 mm	538 mm	173 mm	M 40,5 x 0,5	170 g

Helical mount

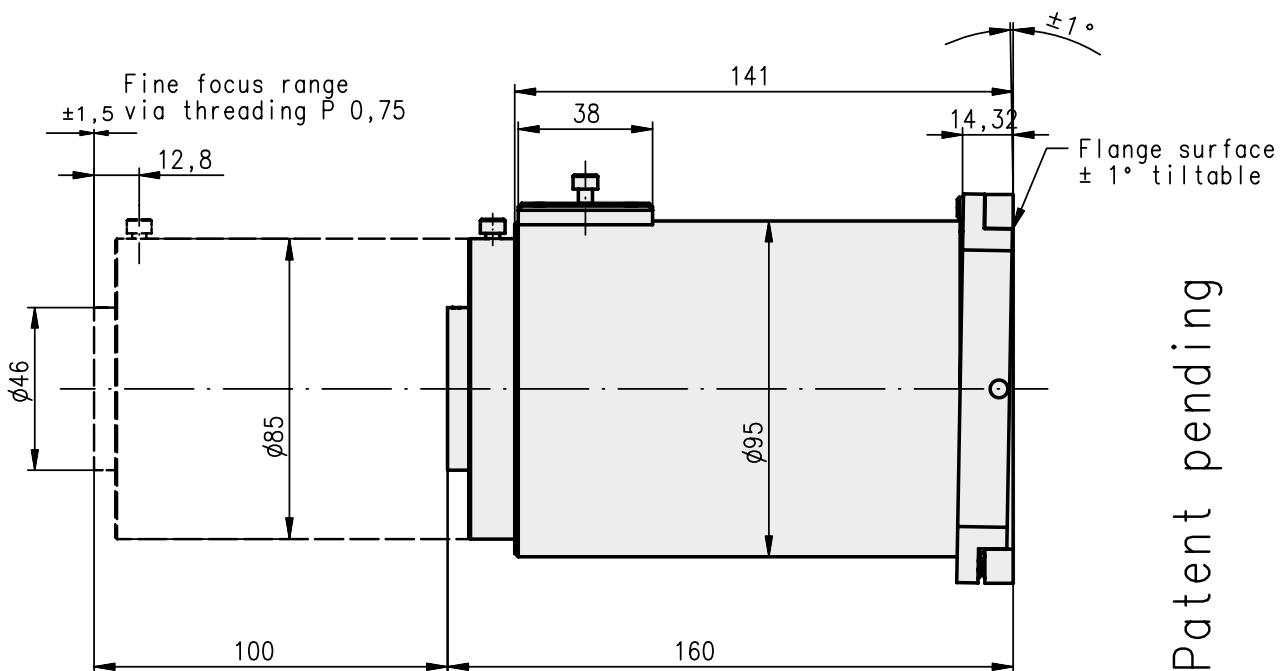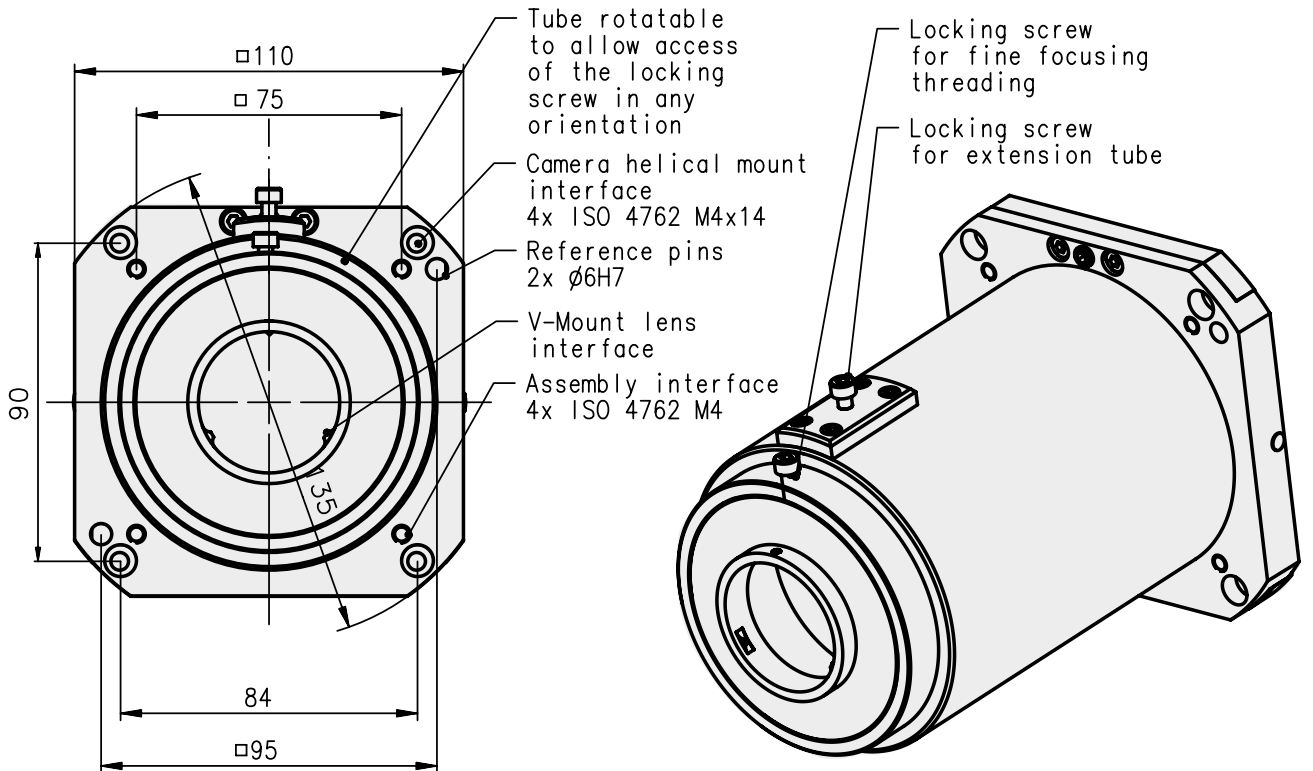

Patent pending

Item	Description	Length min/max	Focusing range	Fine focus range	Tilt range	Camera interface	Lens interface	Code No.
SCH 0089	UNIFOC 100/95 D1	160 mm/260 mm	100 mm	+/- 1.5 mm	+/- 1°	4x M4 84 mm x 90 mm	V-mount	1003231

Jos. Schneider Optische Werke GmbH
 Ringstraße 132
 55543 Bad Kreuznach
 Germany
 Tel.: +49-(0)6 71/6 01-100/-205/-287/-387
 Fax: +49-(0)6 71/6 01-286
www.schneiderkreuznach.com/industrialoptics
industrie@schneiderkreuznach.com

Schneider Optics, Inc.
 285 Oser Ave,
 Hauppauge · NY 11788
 USA
 Phone: +1 631.761.5000
 Fax: +1 631.761.5090
www.schneideroptics.com
oem@schneideroptics.com

